



Electronic Temperature Switch/Sensor- Type 8400

- Indication, monitoring, transmitting and On/Off control in one device
- Extra-large display with Menu
- – 40°C to + 125°C
- Maximum Pressure 16 Bar
- Complete control loop with external setpoint

Description

This intelligent sensor/switch has a large display and is specifically designed to monitor, limit values or offer an ON/OFF or continuous control loop. Two versions are available: the 8400 Compact screwed ½" with in built PT100 sensor and 8400 for wall mounting. The wall-mounted version is supplied with a holder for mounting on a wall, and it must be used with a remote temperature sensor(PT100). The switching points can be programmed with keys directly in the display or optionally with a 4...20 mA standard signal input from an external PLC. As an option, the process value can also be transmitted to the PLC with a 4...20 mA signal. The connection of the 8400 to the process in the piping is made using standard T-fittings with standard connections (G1/2).

Applications


Heat Exchangers
Processing
Cooling and Monitoring

Information

The compact version has a standard PT100 with a 29.5 mm mounting length. We can supply an extended PT100 with a 100 or 200mm mounting length.

Display

Easy to set up and gives a local indication of pressure and set points

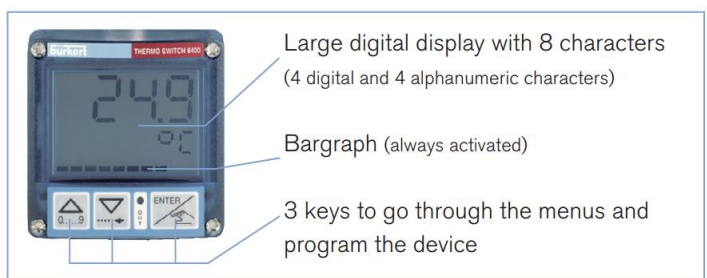

Screw-in temperature sensor/switch with display



- Indication, monitoring, transmitting and On/Off control in one device
- Extra-large display
- Menu-guided parametrisation
- Complete control loop with external setpoint

Type 8400 can be combined with...



Type 6213

Solenoid valve



Type 2301 (8693)

Control Valve
ELEMENT



Type 8644-P AirLINE

Valve island with
electronic I/O



PLC

This intelligent sensor/switch with an extra-large display is specifically designed to switch a valve and to establish a monitoring system or an ON/OFF control loop.

Compact and wall versions are available. The wall-mounted version must be inserted into a holder previously mounted on a wall, and it must be associated with a remote temperature sensor.

The switching points can be programmed with the 3 key pads or optionally, with input 4 ... 20 mA, from an external PLC over a 4 ... 20 mA loop.

As an option, the process value can additionally be transmitted to the PLC (4 ... 20 mA).

The connection of the 8400 to the process in the piping is made using standard fittings.

bürkert
FLUID CONTROL SYSTEMS

General data	
Materials	
Housing	PC, + 20% glass fibre
Front panel folio / Screws	Polyester / Stainless steel
Cable plug, Multipin	PA
Wall-mounted holder	PVC
Materials wetted parts	
Sensor element	Stainless steel
Seal	FKM
Sensor element	Pt100
Screw-in thread	G, NPT, Rc ½"
Electrical connections	Cable plug: EN 175301 - 803 Multipin: swivel M12, 5 pin or M12, 4 pin or 8 pin
Voltage supply cable	max. 100 m, shielded, 0.14 ... 0.5 mm ² max. 5 Ω max. cable impedance (Wall-mounted version)
Complete device data (pipe + electronic module)	
Pipe diameter	Any pipe with sensor connection ½"
Measuring range	
Compact version	-40 ... +125 °C (-40 ... +257 °F) (with ambient temperature between 0 and +40 °C (-32 and 104 °F))
Wall-mounted version	-40 ... +90 °C (-40 ... +194 °F) (with ambient temperature above +40 °C (104 °F)) -40 ... +125 °C (-40 ... +257 °F)
Medium temperature	+125 °C max. (257 °F)
Fluid pressure max.	PN16
Switching accuracy	± 0.5 °C (0.9 °F) (0 ... +80 °C (+32 ... +176 °F)) ± 1.5 °C (2.7 °F) (outside of 0 ... +80 °C (+32 ... +176 °F))
Repeatability	± 0.4 %

Electrical data	
Power supply	12 ... 30 V DC, filtered and regulated
Outputs	
Compact version	
Transistor (configurable)	NPN and PNP, open collector, 5 ... 30 V DC, 700 mA max., protected against short circuits
Relay (configurable)	3 A/250 V AC or 3 A/30 V DC 3 A/48 V AC or 3 A/30 V DC ¹⁾
Process value (option)	4 ... 20 mA, galvanic insulation
Loop resistance:	1000 Ω at 30 V DC, 800 Ω at 24 V DC, 500 Ω at 18 V DC
Wall-mounted version	NPN and PNP, 700 mA, 30 V DC max.
Input external setpoint	
Compact version	4 ... 20 mA, galvanic insulation, max. input impedance: 250 Ω
Current consumption	
Compact version	Max. 80 mA (no load)
Wall-mounted version	Max. 50 mA (no load)
Response time (10...90%)	7 s (for one step increment from 0 ... +100 °C (+32 ... +212 °F))
Reversed polarity of DC	Protected
Environment	
Ambient temperature	-20 ... +60 °C (+4 ... +140 °F)
Relative humidity	≤ 80%, without condensation
Standards, directives and certifications	
Protection class	IP65 with connector plug-in
Standard and directives CE	The applied standards, which verify conformity with the EU Directives, can be found on the EU Type Examination Certificate and/or the EU Declaration of conformity (if applicable)
Pressure	Complying with article 4, §1 of 2014/68/EU directive*


* For the 2014/68/EU pressure directive, the device can only be used under following conditions (depending on max. pressure, pipe diameter and fluid).

Type of fluid	Conditions
Fluid group 1, article 4, §1.c.i	DN ≤ 25
Fluid group 2, article 4, §1.c.i	DN ≤ 32 or PN*DN ≤ 1000
Fluid group 1, article 4, §1.c.ii	DN ≤ 25 or PN*DN ≤ 2000
Fluid group 2, article 4, §1.c.ii	DN ≤ 200 or PN ≤ 10 or PN*DN ≤ 5000

¹⁾ Valid for: external setpoint input and process value output

Main Features

Display

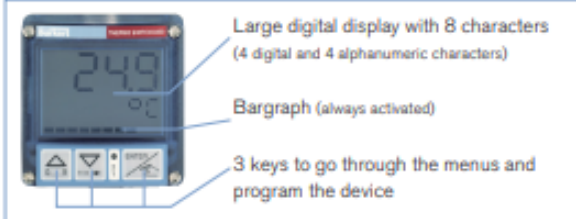

Software main features

- International measuring units
- 10-segment bargraph
- Temperature adjusting for a better accuracy
- Simulation mode to test the programming of the switching points, in dry conditions

8400 with external setpoint


- The switching points are automatically adjusted by the 4 ... 20 mA input signal originating from a PLC.
- On/Off relay output

8400 with process value option

- This version delivers a 4 ... 20 mA electric signal whose value is the image of the measured temperature
- On/Off relay output
- 4 ... 20 mA output
- External setpoint (4 ... 20 mA input)

8400 with standard On/Off output

- 2 switching modes for the output, either hysteresis or window, inverted or not

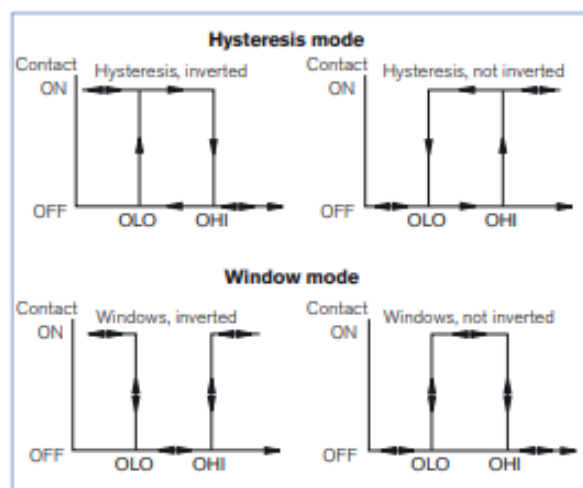

- Programmable delay before switching
- Possible outputs depending on the version: relay, transistor NPN or transistor PNP

Design

The 8400 Temperature sensor is proposed in two versions:



A compact version, available in several variants.

- The 8400 Standard has a Pt100 with a 29.5 mm mounting length.

- The 8400 Extended has a Pt100 with a 100 or 200 mm mounting length. The adaptation of the 8400 will be done through the external thread or also with a compression fitting (no part of delivery). This allows variable mounting in bigger pipe diameters or tanks.



A wall-mounted version:

- The 8400 Wall has to be inserted into a holder previously mounted on a wall. It must be associated to a remote temperature sensor.

Typical application example



Monitoring of min./max. levels of temperature in a running process (compact *INLINE* control)




Continuous temperature control in a running process



On/Off temperature control of liquid processing in a programmable narrow band (remote control)

Dimensions

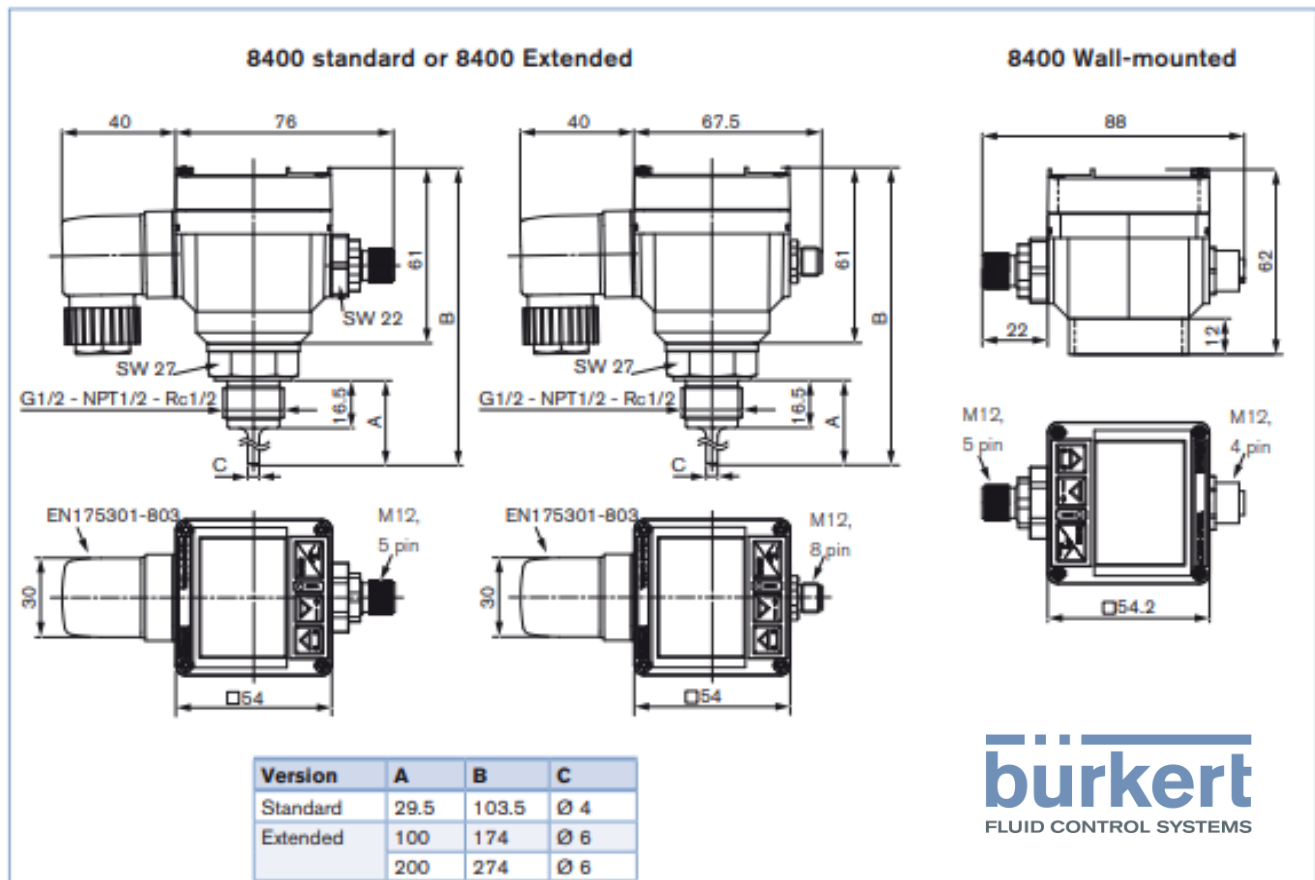

Ordering chart for Type 8400 (other versions on request)

Sensor version	Sensor element	Voltage supply	Screw-in thread	Input	Output	Connector	Article no.
Standard, compact	29.5 mm - Ø 4 mm	12 ... 30 V DC	G ½"	-	NPN and PNP	5 pin swivel M12 plug (male)	436501 🔗
					Relay	5 pin swivel M12 plug (male) and cable plug EN 175301-803*	436503 🔗
				4 ... 20 mA ¹⁾	4 ... 20 mA ²⁾ + Relay	8 pin M12 plug (male) and cable plug EN 175301-803*	444696 🔗
			NPT ½"	-	NPN and PNP	5 pin swivel M12 plug (male)	436507 🔗
					Relay	5 pin swivel M12 plug (male) and cable plug EN 175301-803*	436509 🔗
				4 ... 20 mA ¹⁾	4 ... 20 mA ²⁾ + Relay	8 pin M12 plug (male) and cable plug EN 175301-803*	444698 🔗
			Rc1/2"	-	NPN and PNP	5 pin swivel M12 plug (male)	436504 🔗
					Relay	5 pin swivel M12 plug (male) and cable plug EN 175301-803*	436506 🔗
				4 ... 20 mA ¹⁾	4 ... 20 mA ²⁾ + Relay	8 pin M12 plug (male) and cable plug EN 175301-803*	444697 🔗
Extended, compact	100 mm - Ø 6 mm	12 ... 30 V DC	G ½"	-	Relay	5 pin swivel M12 plug (male) and cable plug EN 175301-803*	550053 🔗
				4 ... 20 mA ¹⁾	4 ... 20 mA ²⁾ + Relay	8 pin M12 plug (male) and cable plug EN 175301-803*	550055 🔗
	200 mm - Ø 6 mm		G ½"	-	Relay	5 pin swivel M12 plug (male) and cable plug EN 175301-803*	550054 🔗
				4 ... 20 mA ¹⁾	4 ... 20 mA ²⁾ + Relay	8 pin M12 plug (male) and cable plug EN 175301-803*	550056 🔗
Wall-mounted	-	12 ... 30 V DC	-	3-wired Pt100	NPN and PNP	5 pin swivel M12 plug (male) and 4 pin M12 plug (female)	448862 🔗

¹⁾ Ext. Setpoint²⁾ Process value³⁾ EN 175301-803: Europe /Asia (G / Rc) : M16 x 1.5 mm cable plug (female)
USA/ CDN (NPT): NPT ½ cable plug (female)

The adaptation of the 8400 will be done through the external thread or also with a compression fitting (no part of delivery). This allows variable mounting in bigger pipe diameters or tanks.

Ordering chart for accessories (to be ordered separately)

Description	Article no.
5 pin M12 female cable connector with plastic threaded locking ring	917116 🔗
5 pin M12 female connector moulded on cable (2 m, shielded)	438680 🔗
4 pin M12 male cable connector with plastic threaded locking ring	448856 🔗
4 pin M12 male connector moulded on cable (2 m, shielded)	448857 🔗
8 pin M12 female cable connector with plastic threaded locking ring	444799 🔗
8 pin M12 female connector moulded on cable (2 m, shielded)	444800 🔗
Cable plug EN 175301-803 with cable gland (Type 2508)	438811 🔗
Cable plug EN 175301-803 with NPT ½" reduction without cable gland (Type 2509)	162673 🔗

**Temperature Switch****Flow Switch****Level Switch**

If you want to Switch then look no further. We offer free advice on switching products for systems, that interconnect with our valves. Economically priced and readily available. Typical application diagrams are available for your use.