

Brass Ball Valve Heavy Pattern Lever Operated

- Hard Chrome Plated Ball
- ½ to 2"
- Aluminium Lever Handle
- BSPP Screwed End Connection
- PN64 Rated
- Temperature -20°C to 150°C

Description

A full bore brass ball valve classed as Heavy Pattern. Rated PN64 ½"-1" and PN50 1¼"-2". Brass body with a nickel plating, PTFE seats and NBR O Ring seals.. Used to shut off and isolate flows in a pipeline. The valve is screwed BSPP (parallel) female ends as standard it has a cast aluminium lever handle. European manufacturer-RIV



*Also available with
Butterfly Handle*



Description

A brass nickel plated ball valve that's used for many general industrial applications throughout the UK and Europe. Full flow with anti blowout stem. Screwed BSPP and fitted with an Aluminium handle. Temperature range for fluids -20°C to +150°C. Pressure rating (see specifications).



Beschreibung

Ein vernickelter Kugelhahn aus Messing, der für viele allgemeine industrielle Anwendungen in Großbritannien und Europa verwendet wird. Voller Durchfluss mit Anti-Blowout-Vorbau. BSPP geschraubt und mit einem Aluminiumgriff ausgestattet. Temperaturbereich für Flüssigkeiten -20 ° C bis + 150 ° Druckstufe (siehe Spezifikationen).



Descripción


Una válvula de bola de latón niquelado que se utiliza para muchas aplicaciones industriales generales en el Reino Unido y Europa. Flujo total con vástago anti-explósión. BSPP atornillado y equipado con un mango de aluminio. Rango de temperatura para fluidos -20 ° C a + 150 ° C. Clasificación de presión (ver especificaciones).



Description

Un robinet à tournant sphérique en laiton nickelé utilisé pour de nombreuses applications industrielles générales au Royaume-Uni et en Europe. Plein débit avec tige anti-éclatement. BSPP vissé et équipé d'une poignée en aluminium. Plage de température pour fluides de -20 ° C à + 150 ° C. Pression nominale (voir spécifications).

BV4334

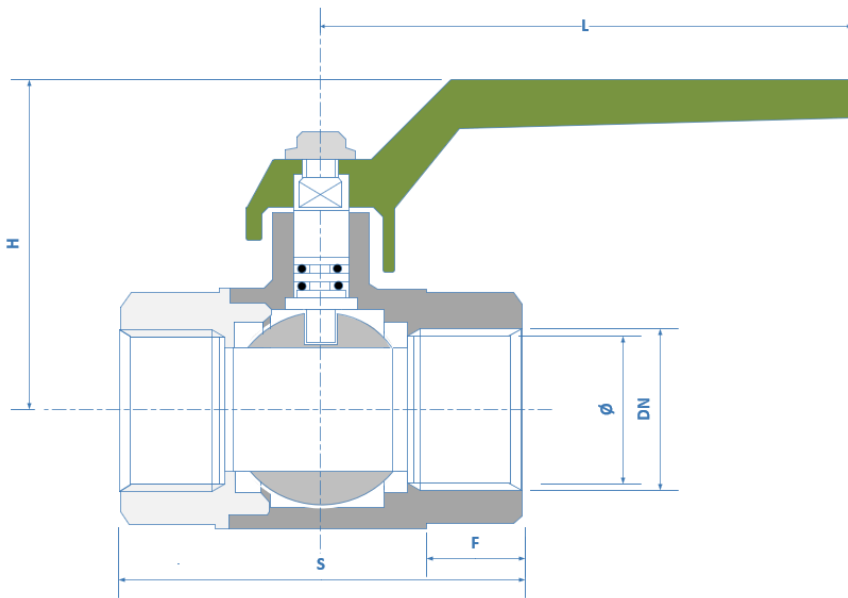

Pressure / Temperature Ratings	
Max Pressure	PN64 1/2"-1", PN50 1 1/4"-2"
Temperature	-10°C to 90°C


Dimensions shown are for guidance only

Dimensions


Size	Ø	H	S	L	F	Cv	Kv	Kg
1/2"	15	55	59	90	17	17.9	15.5	0.3
3/4"	20	66	69	120	18	36	31	0.5
1"	25	70	83	120	22	60	52	0.7
1 1/4"	32	83	94	135	135	116	100	1.1
1 1/2"	40	93	102	160	160	208	180	1.5
2"	50	102	124	160	160	405	350	2.3

Material List


1	Body	Nickel Plated Brass
2	End	Nickel Plated Brass
3	Ball	Chrome Plated Brass
4	Seats	PTFE
5	O-Ring	Viton
6	O-Ring	NBR
7	Stem	Brass
8	Lever	Aluminium
9	Screw	Zinc Plated Steel

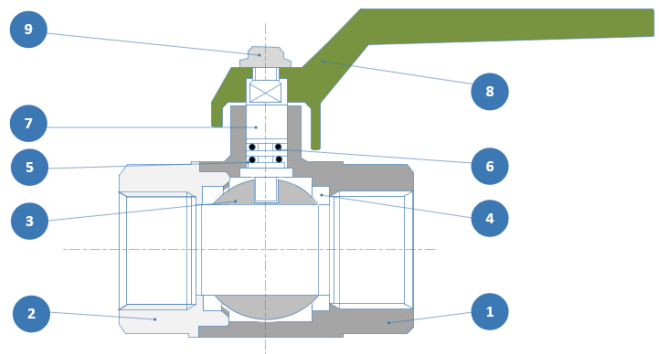

Pressure/Temperature Chart

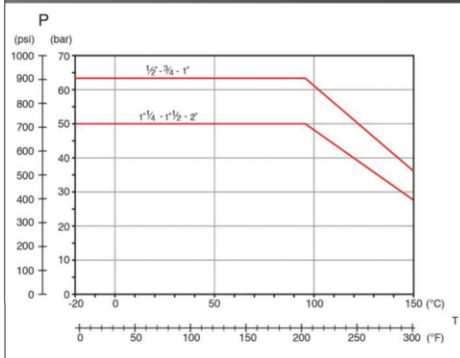

Pressure Loss Chart

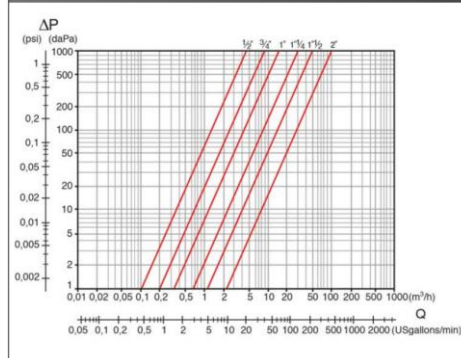

All information is sourced from our manufacturer's data and is intended for guidance only - Valves Online can accept no liability for changes, omissions or errors.