





SKU: GV4652

-  VOLT Cast Iron Gate Valve Flanged ANSI 150
-  VOLT Roheisen- Absperrschieber mit Flansch ANSI 150
-  VOLT Cast Iron Gate Válvula con bridas ANSI 150
-  VOLT Cast Iron Gate Valve bride ANSI 150

Valves[™]
O N L I N E

- 11/2" - 12" Cast Iron Gate Valve Bronze Seat – ANSI 150
- 11/2" - 12" Cast Iron Gate Valve Bronze Sitz – ANSI 150
- 11/2" - 12" Cast Iron Gate Válvula Bronce Asiento – ANSI 150
- 11/2" - 12" Cast Iron Gate Valve Bronze Seat – ANSI 150

Cast Iron Gate Valve ANSI 150 Bronze Seat



Description:

A Flanged Cast Iron ANSI 150 Flat Face Gate Valve.
Hand wheel Operated with Inside Screw
Non Rising Stem.
GG25 Body, Cast Bronze Seat, Brass Stem,
Rated PN16,
Temperature -10°C to 150°C.



Description

Flanged ANSI 150, GG25 Body, Cast Bronze Seat, Brass Stem, inside Screw and Non Rising Stem. Pressure rating of PN16 Temperature up to 150° C



Beschreibung

Mit Flansch ANSI 150, GG25 Körper, Cast Bronze Seat, Messing Stängel, Innenschraubend nicht steigender Spindel. Druckstufe PN16 Temperaturbereich bis 150° C



Descripción

Con bridas ANSI 150, GG25 Cuerpo, asiento de bronce fundido, Tallo de latón, en el interior del tornillo y no Rising Tallo. Resistencia a la presión de PN16 Temperatura hasta 150° C







Description


Brides ANSI 150, GG25 corps, siège de bronze de fonte, laiton Tige, à l'intérieur de vis et non tige montante. Pression nominale PN16 Température jusqu'à 150° C

Paint Finish

These valves are supplied externally with a Phenolic-oil resin called SITIPAIN for transport and storage use. We recommend the valve be painted for site installation. The valves can be easily re painted with synthetic enamels top coat and also with Bicomponent industrial epoxy coating. Technical details can be obtained on request.

-  VOLT Cast Iron Gate Valve Flanged ANSI 150
-  VOLT Roheisen- Absperrschieber mit Flansch ANSI 150
-  VOLT Cast Iron Gate Válvula con bridas ANSI 150
-  VOLT Cast Iron Gate Valve bride ANSI 150

ANSI 150 Cast Iron Gate Valve

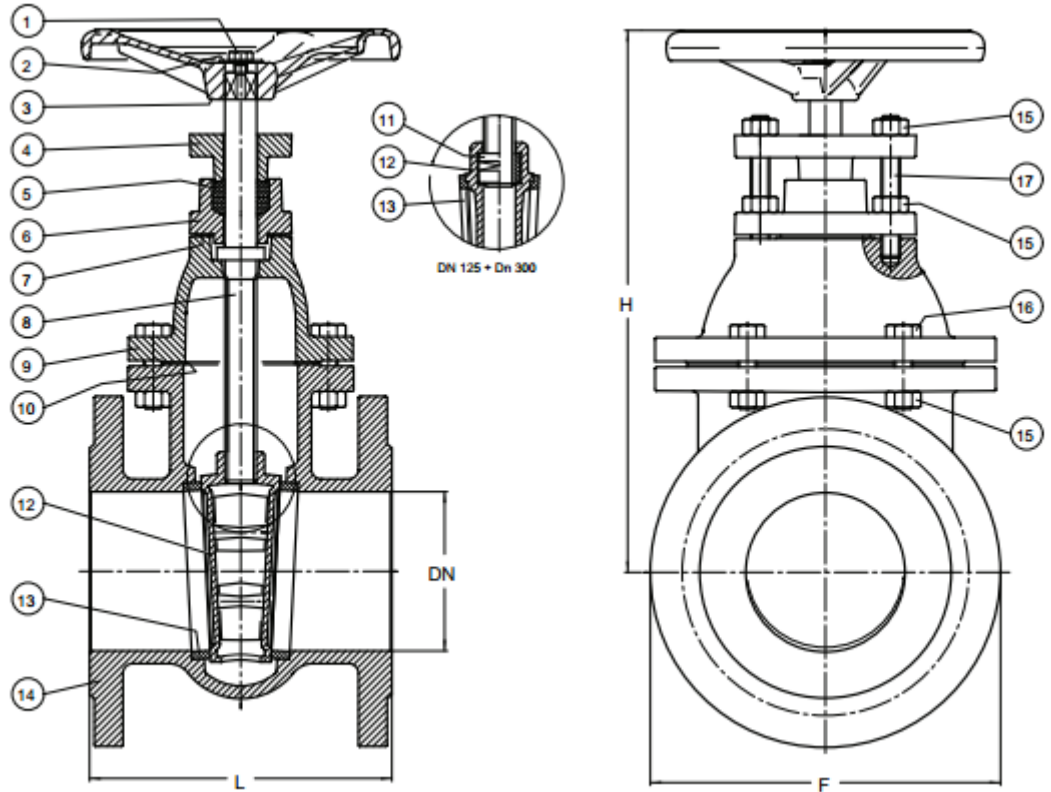



Dimensions					
DN	Size	F	L	H	Kg
50	2"	165	178	275	13
65	2 1/2"	185	190	335	17
80	3"	200	203	380	23
100	4"	229	229	435	32
125	5"	250	254	495	43
150	6"	285	267	585	56
200	8"	340	292	710	89
250	10"	405	330	830	134
300	12"	483	356	960	181

Pressure / Temperature Rating	
Pressure	ANSI 150
Temperature	- 10°C to 150°C

Flanged ANSI 150 Flat Face,
GG25 Body, Cast Bronze
Seat, Brass tem, Inside Screw
and Non Rising Stem.

-  VOLT Cast Iron Gate Valve Flanged ANSI 150
-  VOLT Roheisen- Absperrschieber mit Flansch ANSI 150
-  VOLT Cast Iron Gate Válvula con bridas ANSI 150
-  VOLT Cast Iron Gate Valve bride ANSI 150

ANSI 150 Cast Iron Gate Valve

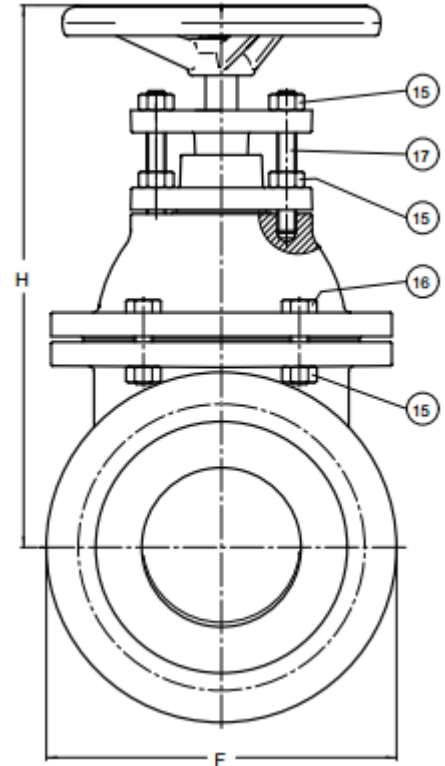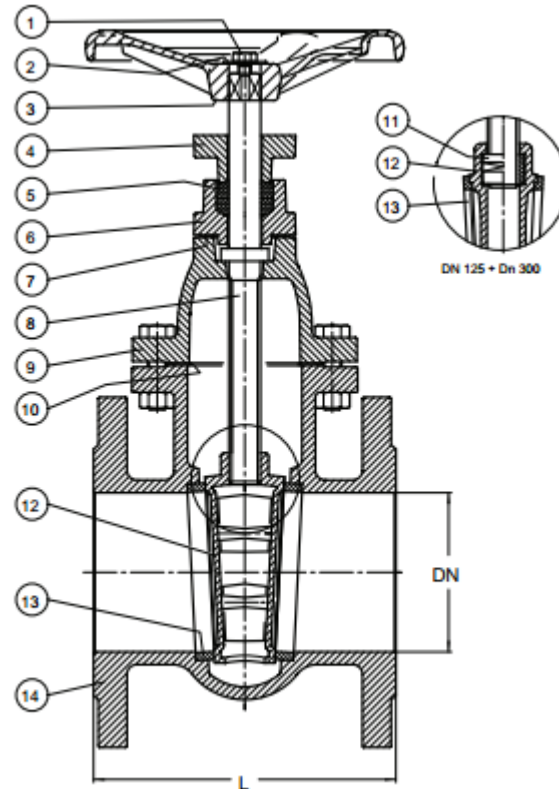

Material List

Item	Part	Description
1	screw	zinc plated carbon steel
2	washer	zinc plated carbon steel
3	handwheel	cast iron
4	packing gland	cast iron
5	packing gland	PTFE
6	stuffing box	cast iron
7	gasket	Asbestos Free
8	stem	Brass
9	bonnet	cast iron
10	gasket	Asbestos Free
11	motherscrew	cast brass
12	wedge	cast brass DN40 to DN100 cast iron DN125 to DN300
13	seat	cast bronze
14	body	cast iron
15	nut	carbon steel
16	screw	carbon steel
17	tie rod	carbon steel

Flanged ANSI 150 Flat Face,
GG25 Body, Cast Bronze
Seat, Brass tem, Inside Screw
and Non Rising Stem.