
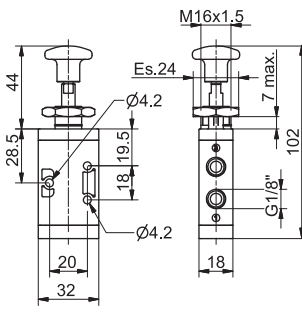
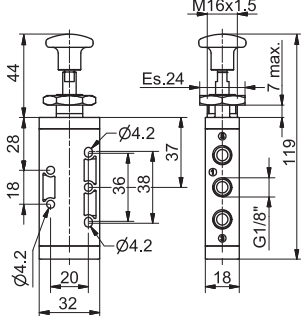
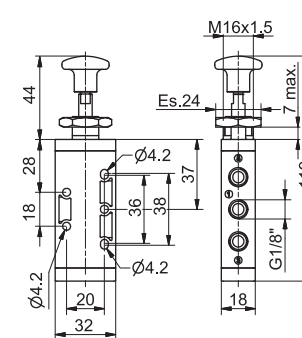


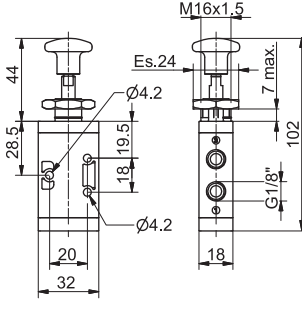
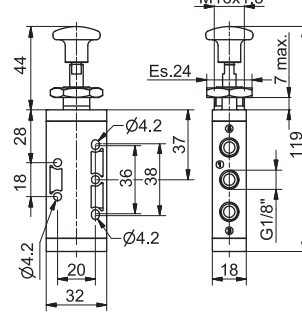
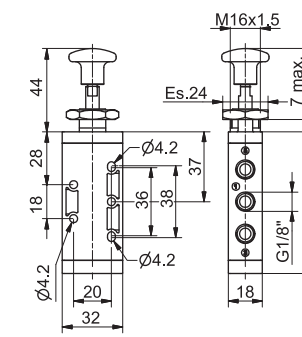


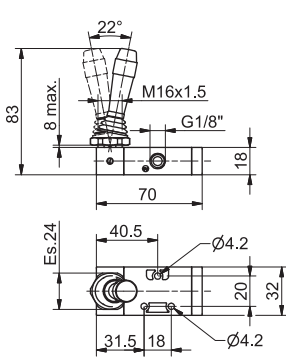
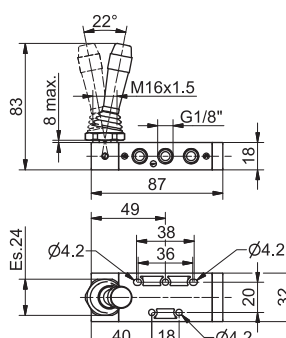
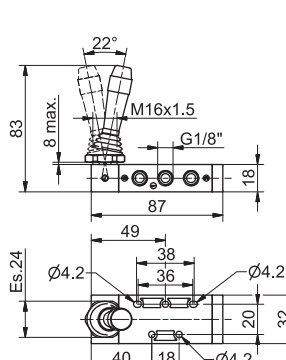



Push button-Spring		3/2	Ordering code		5/2	Push button-Spring	
 		T228.1.8.1/C TYPE 1 32 = 3 ways 52 = 5 ways BUTTON COLOR 1 = Red 2 = Black 3 = Green		 			
Operational characteristics	Fluid	Max working pressure	Operating Temperature		Flow rate at 6 bar with $\Delta p=1$	Orifice size	Working ports size
	Filtered air, with or without lubrication	10 bar	Min. -5°C	Max. +50°C	620 Nl/min	mm 6	G 1/8"

Push button-2 positions		3/2	Ordering code		5/2	Push button-2 positions	
 		T228.1.8/C TYPE 1 32 = 3 ways 52 = 5 ways BUTTON COLOR 1 = Red 2 = Black 3 = Green		 			
Operational characteristics	Fluid	Max working pressure	Operating Temperature		Flow rate at 6 bar with $\Delta p=1$	Orifice size	Working ports size
	Filtered air, with or without lubrication	10 bar	Min. -5°C	Max. +50°C	620 Nl/min	mm 6	G 1/8"

Lever lateral-Spring		3/2	Ordering code		5/2	Lever lateral-Spring	
 		T228.1.9.1/C TYPE 1 32 = 3 ways 52 = 5 ways BUTTON COLOR 1 = Red 2 = Black 3 = Green		 			
Operational characteristics	Fluid	Max working pressure	Operating Temperature		Flow rate at 6 bar with $\Delta p=1$	Orifice size	Working ports size
	Filtered air, with or without lubrication	10 bar	Min. -5°C	Max. +50°C	620 Nl/min	mm 6	G 1/8"