




SKU: YS5036

-  VOLT Y Type Bronze Strainer Standard Pattern
-  VOLT Y -Typ Schmutzfänger Bronze Standard- Pattern
-  VOLT Patrón Y Bronce Tipo Colador Standard
-  VOLT Motif Y Type de Bronze crépine standard

Valves[™]
O N L I N E

- 1/2 " - 4" Bronze Y Type Strainer
- 1/2 " - 4" Bronze Y -Typ Schmutzfänger
- 1/2 " - 4" Bronze Y Tipo Colador
- 1/2 " - 4" Bronze Y Type de crépine



Description
Compact and Reliable our Y Type Strainer in Bronze. Screwed BSPP, giving a 0.5mm filtration stainless steel screen. Recommended for applications where damage to valves or prime equipment needs to be avoided. Economic, lightweight and compact in size.

Bronze Strainer Screwed BSP



Description

Volt Bronze Y type strainer, manufactured to the highest standards. PN16 rated and sizes from 1/2" - 4". Easy to Maintain and clean, 0.5 mm mesh - 10°C to 110°C



Beschreibung

Volt Bronze Y Schmutzfänger , nach den höchsten Standards gefertigt. PN16 bewertet und Größen von 1/2 " - 4" leicht zu pflegen und sauber.



Descripción

Volt tipo Bronce Y colador, fabricados con los más altos estándares . PN16 nominal y tamaños desde 1/2 " - 4 " Fácil de mantener y limpiar.



Description


Laiton économique de type Y crépine , fabriqué selon les normes les plus élevées . PN16 nominale et tailles de 1/4 " - 4 " facile à entretenir.

-  VOLT Y Type Bronze Strainer Standard Pattern
-  VOLT Y -Typ Schmutzfänger Bronze Standard- Pattern
-  VOLT Patrón Y Bronze Tipo Colador Standard
-  VOLT Motif Y Type de Bronze crépine standard

Bronze Y Type Strainer

Dimensions

Size d	L	H	W(kg)
1/2"	65	42	0.25
3/4"	85	45	0.4
1"	92	47	0.48
1 1/4"	105	65	0.75
1 1/2"	115	72	0.92
2"	147	98	1.66
2 1/2"	145	136	2.72
3"	167	148	3.65
4"	226	185	7.22

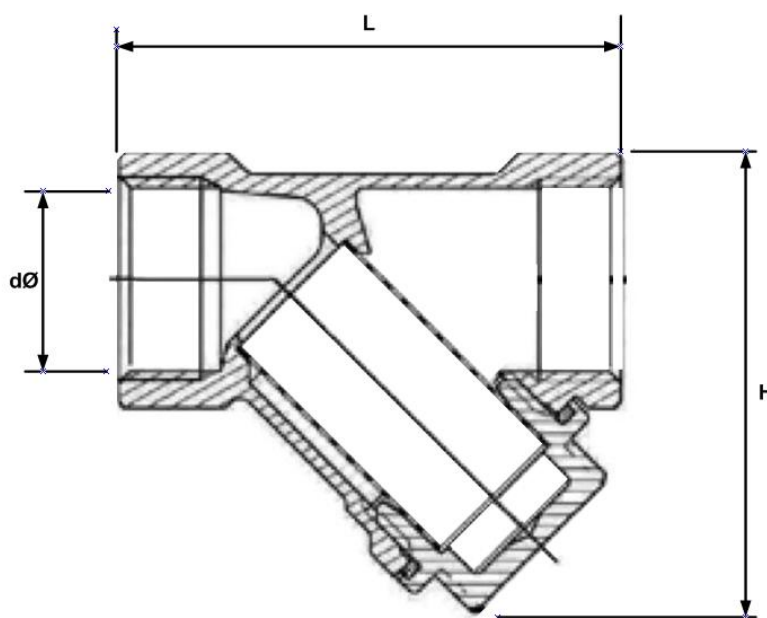

Material

Body	Bronze
Filter Screen	Stainless Steel
Gasket	Asbestos Free
Plug	Bronze

Pressure/Temperature

Max Working Pressure	16 Bar
Max Temperature	110 Deg C
Screen Size	0.5mm 500, Micron, 35 U.S. Mesh

Size	Kv
1/2"	4,6
3/4"	7,8
1"	11,2
1 1/4"	16,1
1 1/2"	22,5
2"	27,0
2 1/2"	32,0
3"	57,0
4"	95,0